

Rotary Separator

AMSPR

- The machine has two separate sections in order to separate small and large impurities from the main products and the products are cleaned in the passage of all surface of the meshes in the upper & under side sections.
- Meshes of the machine is cleaned by elastic balls.
- The machine has vibration movement and is created by an adjustable system.
- 8 special joint shock absorbers make the multi dimension movement possible.
- The machine can be installed on the chassis or can be hanged from the roof.
- Up & down frames are locked by a special mechanism & bringing out the frames are easily possible by opening these locks.

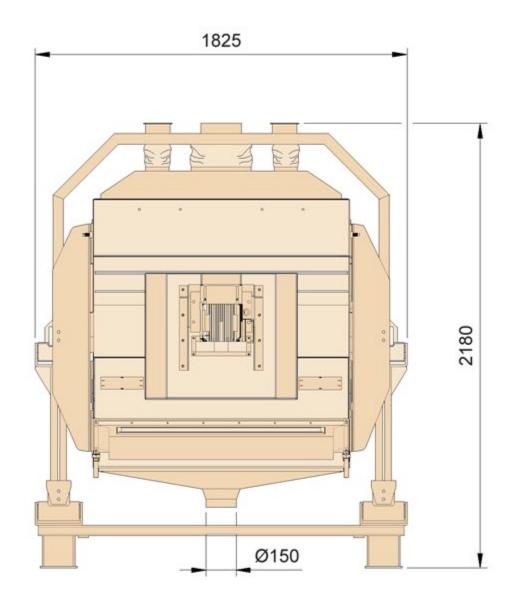

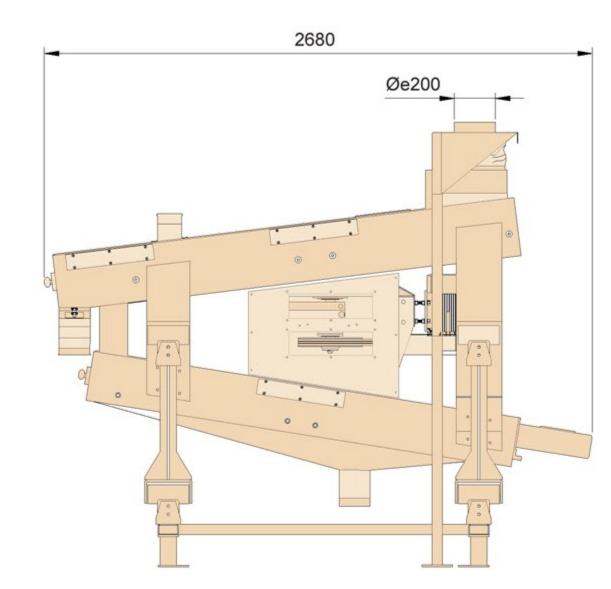

Ard Machine Rotary Separator

Турс	Capacity [t/h]				Motor			
	Pre separator		separator		(50 Hz)	Aspiration [m³/min]	Net weight [Kg]	Shipping Volume [m³]
	Wheat	Maize	Wheat	Maize	[Kw]		. 0.	
AMSPR	80	60	20	16	1.5	11	1240	10

Factory: Qazvin Industrial Zone

Tel.: +98 282 222 30 29

Fax: +98 282 222 30 19

ARD MACHINE manufacturing company

Head office: Vali-e-Asr Ave. No.1050/6 - Seventh Floor No.702 - Post Code: 14338 - Tehran - Iran

Tel.: +98 21 88713695 & 7 Fax: +98 21 88713685

E-mail: info@ardmachine.com Web Site: www.ardmachine.com