

Screw Conveyor


AMSC

Function


- Conveying any kind of cereals and milling products horizontally.

Main Features

- Possessing rustproof steel casing.
- Employing standard powerful bearings on the sides in addition to specially designed middle bearings, which can be greased.
- Equipped with a micro-switching system, which adjust the operation of the gear-electric motor.

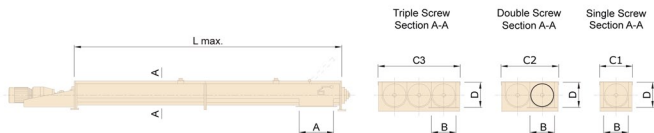

Single Screw Conveyor with Service Door

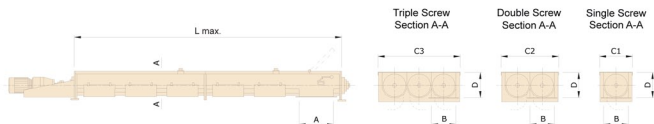

Ard Machine Screw Conveyor

Type	Capacity (100 rpm)*[t/h]			Dimensions [mm]						L max. [m]
	Wheat	Flour	Bran	A	B	C1	C2	C3	D	
AMSC 200	11	7.5	3	300	215	295	515	733	225	40
AMSC 250	22.5	15	6	375	265	355	625	895	275	45
AMSC 300	45	30	12	450	315	415	735	1055	325	50
AMSC 350	67.5	45	18	500	365	465	835	1205	385	50

* Maximum rotation speed is 120 rpm.

ARD MACHINE
manufacturing company

Head office: Vall-e-Asr Ave. No.1050/6 - Seventh Floor
No.702 - Post Code: 14338 - Tehran - Iran
Tel.: +98 21 88713695 & 7 Fax: +98 21 88713685

Factory: Qazvin Industrial Zone
Tel.: +98 262 222 30 29
Fax: +98 262 222 30 19

E-mail: info@ardmachine.com
Web Site: www.ardmachine.com